

S840-V20



For machines, operating elements, crane systems

- ➔ Compact and very flat micro switch
- ➔ Non-touchable switch
- ➔ Self cleaning contacts
- ➔ Connection in one plane

Product description

The microswitch S840-V20 is measured in a very small size. With the adjustment screw you could change to switching point for best result on your application. All contact have two connectors, so it will be easy if you have to batch several switches.

Technical Data

Common contact
Rest contact, normally closed
Actuating contact, normally open

COM (1)
NC (2)
NO (3)

Technical data
Switching power


250V AC 10A
24V DC 6A

Contact material

silver

Mechanical life
Contact pressure
Temperature resistance
Double solder and plug connection
Weight


>10 mill.
0.2 N
-40 ... +85 °C
2 x 6.3 x 0.5 mm (DIN 46244 A)
approx. 8 g



S840-V20



Reference drawing in mm

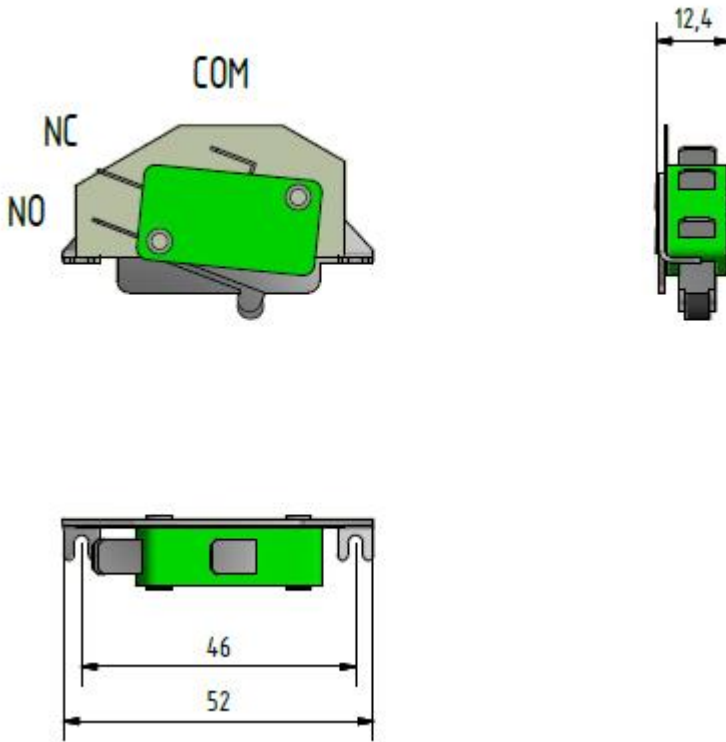

Order Code

Part number	Description
6099.22.846	Microswitch S840-V20



Do you have any questions ?

Phone: +41 (0)44 843 40 20 or Mail: sales@micronor.ch